

HG 5000 E

Precision & Power

Technical Specifications

Voltage: 230 VAC / 50 Hz Output: 3400 watts

Airflow Rate: Up to 28 crm, 3,000 Pa air pressure

Amps: 14.8

Temperature: $80 \degree F - 1100 \degree F, 27 \degree C - 599 \degree C$

Display: Indicates actual and target temp. in 10° F Increments Element: SmartChip™ DuraTherm™ ceramic heating element

Net Weight: 3.2 lbs

Dimensions: 14.5" x 4.3" x 4.3" (L x W x D)

Features: Powerful 230 V heat gun with 28 cfm output, Fully electronic

temperature and airflow control, Intelligent motor and temperature control, LED temperature display showing selected and actual temperature, High-performance, long life brushless motor, Easy-to-change element, Smartchip technology allows the gun to

calibrated with the new element


Applications: Flooring, roofing, avionics, shrink wrapping, activating

adhesives, softening compounds, window tinting, bending plastics

and other applications requiring long life and even heat

Warranty: 1 year limited



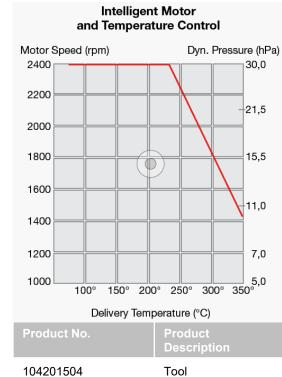

110049782

Tool w/ Metal Case

9051 Lyndale Ave. South | Bloomington, MN 55420 STEINEL America, Inc. v. 01.23